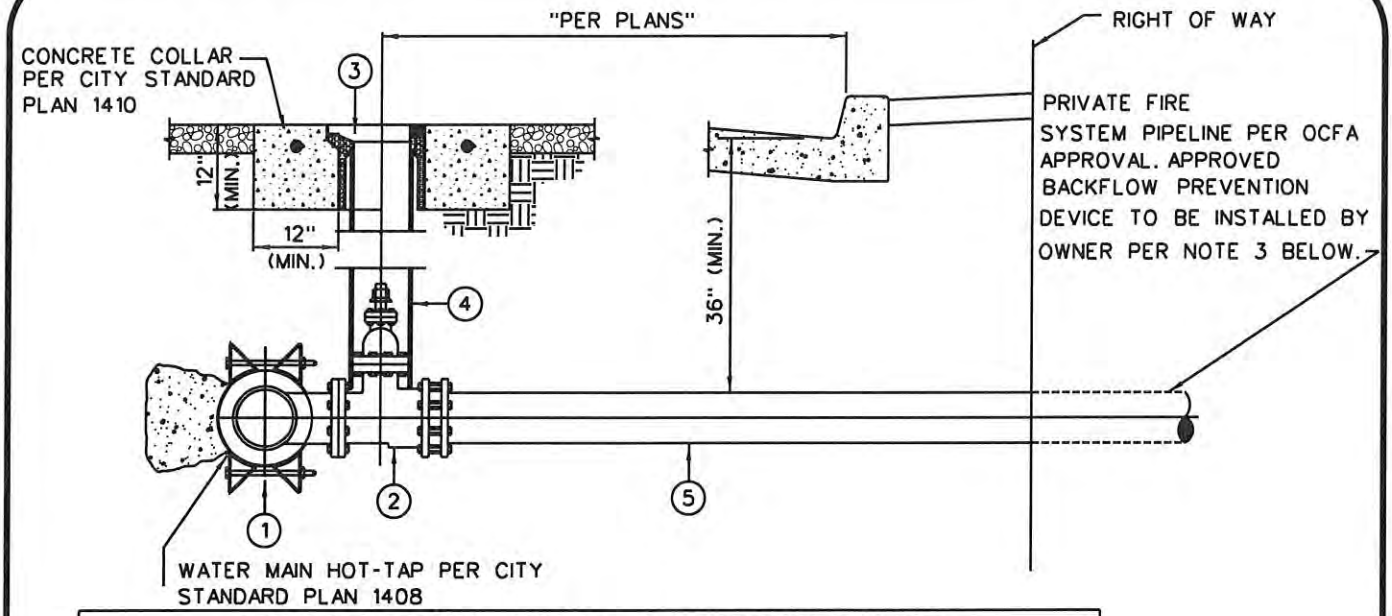

CONSTRUCTION ITEMS / MATERIALS LIST

NO.	SIZE AND DESCRIPTION	MANUFACTURER	MFR. CAT. NO.
1	TAPPING SLEEVE (EPOXY COATED & STAINLESS STEEL BOLTS)	FORD SMITH-BLAIR	FTSC 622
2	TAPPING VALVE, "RESILIENT WEDGE" FLG. x M.J.	CLOW OR EQUAL	F-6108
3	VALVE BOX FRAME & COVER, C.I.	BROOKS	NO. 4TT (FOR TRAFFIC USE)
4	P.V.C. PIPE, 8" (SCHEDULE 40)	———	———
5	LATERAL PIPE: CLASS 200, C900 P.V.C.	———	———

NOTES:

1. ALL BURIED IRON SHALL BE WRAPPED WITH 1 LAYER OF 10 MIL POLYETHYLENE SHEETING TAPED IN PLACE. SEE SPECIFICATIONS.
2. ALL BURIED NUTS AND BOLTS SHALL BE COATED WITH 2 COATS MASTIC SUCH AS "3M" BRAND EC 244 OR EQUAL.
3. ALL ON-SITE PRIVATE FIRE PROTECTION SYSTEMS REQUIRE PROPER BACKFLOW DEVICE(S). DEVELOPER SHALL CALL CITY'S WATER QUALITY INSPECTOR AT (714) 647-3320 FOR BACKFLOW DEVICE REQUIREMENTS.

APPROVED: Nabil Saba DATE: 3/8/2016

CITY OF SANTA ANA

PUBLIC WORKS AGENCY

DATE		REVISION
9/28/01	A.F.	DELETED P.O.C.
5/16/05	A.F.	LATERAL PIPE CLASS & TYPE
6/4/13	J.A.	UPDATED
3/1/16	R.R.	UPDATED

FIRE SERVICE

STD. PLAN NUMBER 1417