




PLANTING REQUIREMENTS:

1. TREE SPACING 35' MIN. TO 50' MAX.
2. PLANT 50' MIN. FROM BCR ON THE APPROACH TO AN INTERSECTION AND 15' FROM THE BCR ON THE EXIT SIDE.
3. PLANT 10' MIN. FROM EDGE OF DRIVE APPROACH.
4. PLANT 10' MIN. FROM UTILITY & SEWER LINES.
5. PLANT 20' MIN. FROM STREET LIGHT STANDARDS AND POWER POLES.
6. PLANT 10' MIN. FROM FIRE HYDRANTS.
7. TREE TO BE CENTERED IN 3'X3' TREE WELL.
8. PACKED BACKFILL SOIL WILL INCLUDE CROSS-LINKED POLYACRYLAMIDE ADDITIVE PER MANUFACTURERS SPECIFICATION.

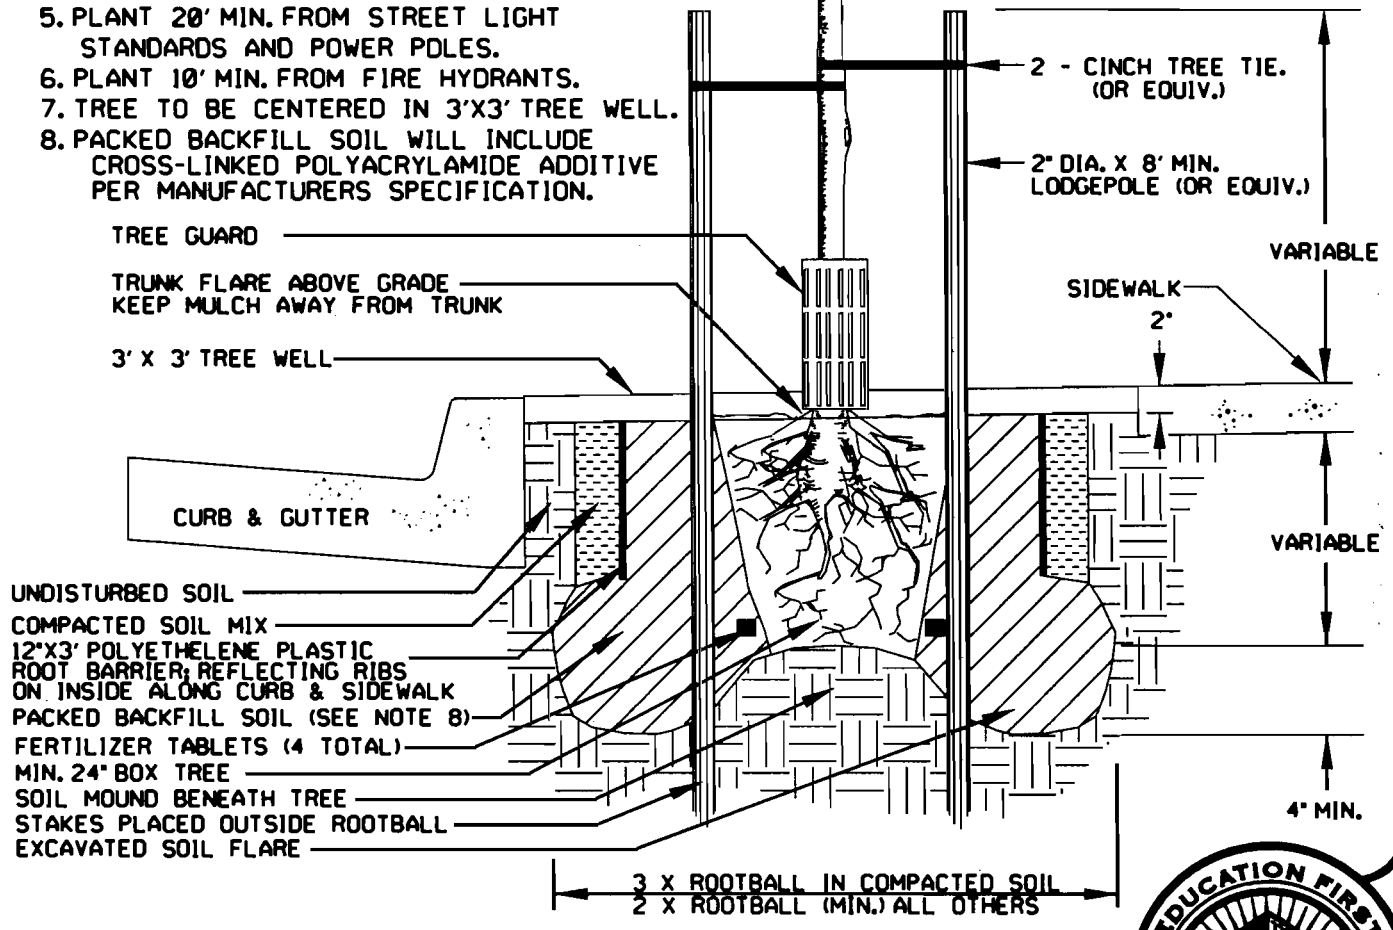

NOT TO SCALE



APPROVED: *George Abong* DATE: 11-19-07
CITY ENGINEER

CITY OF SANTA ANA
PUBLIC WORKS AGENCY

DATE	REVISION
4-14-93	CHANGE IN ROOT BARRIER AND TREE TIE
12-19-96	CHANGE IN DIMENSIONS
10-14-04	CHANGE IN ROOT BARRIER
11-19-07	CHANGE IN BACKFILL SOIL MIX

STREET TREE
IN TREEWELL
PLANTING DETAIL

STD. PLAN
NUMBER
1124B