



CASE 1, SIDEWALK AND PARKWAY

W=5' ON ARTERIAL STREETS
W=4' ON LOCAL STREETS

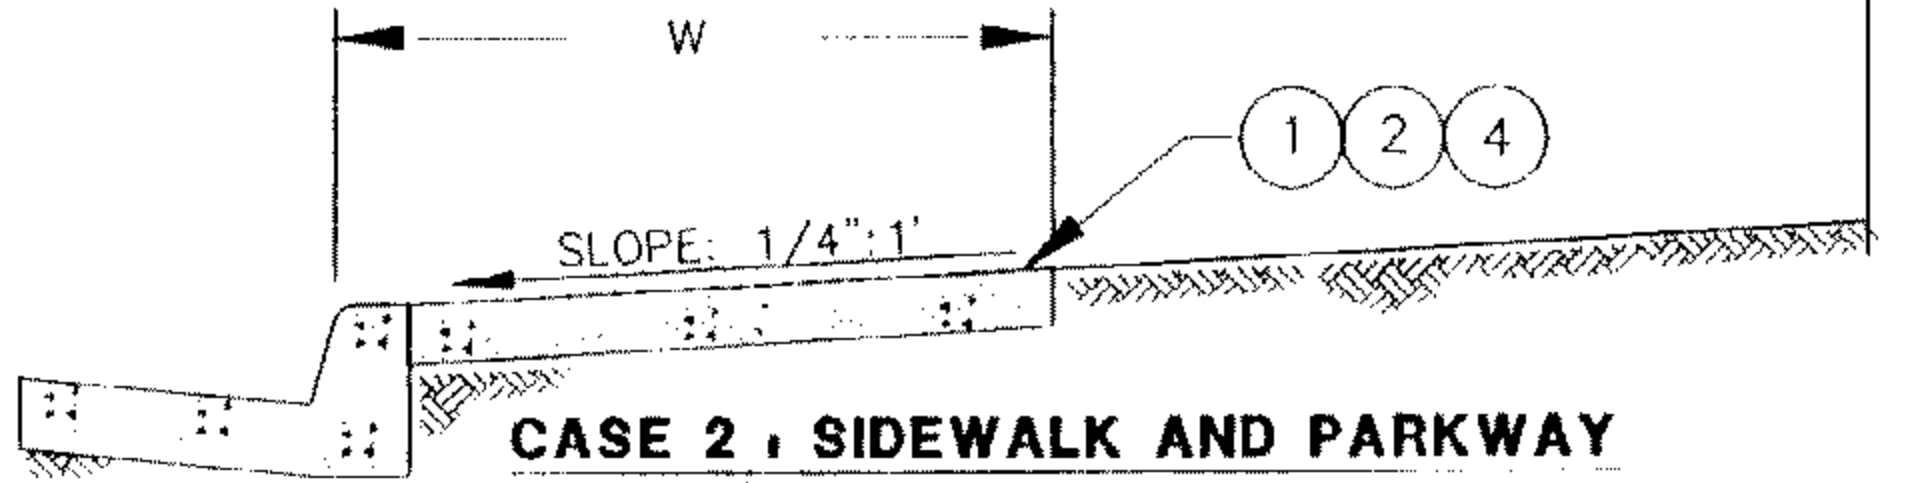

CASE 2, SIDEWALK AND PARKWAY

W=8' ON ARTERIAL STREETS
W=4' ON LOCAL STREETS

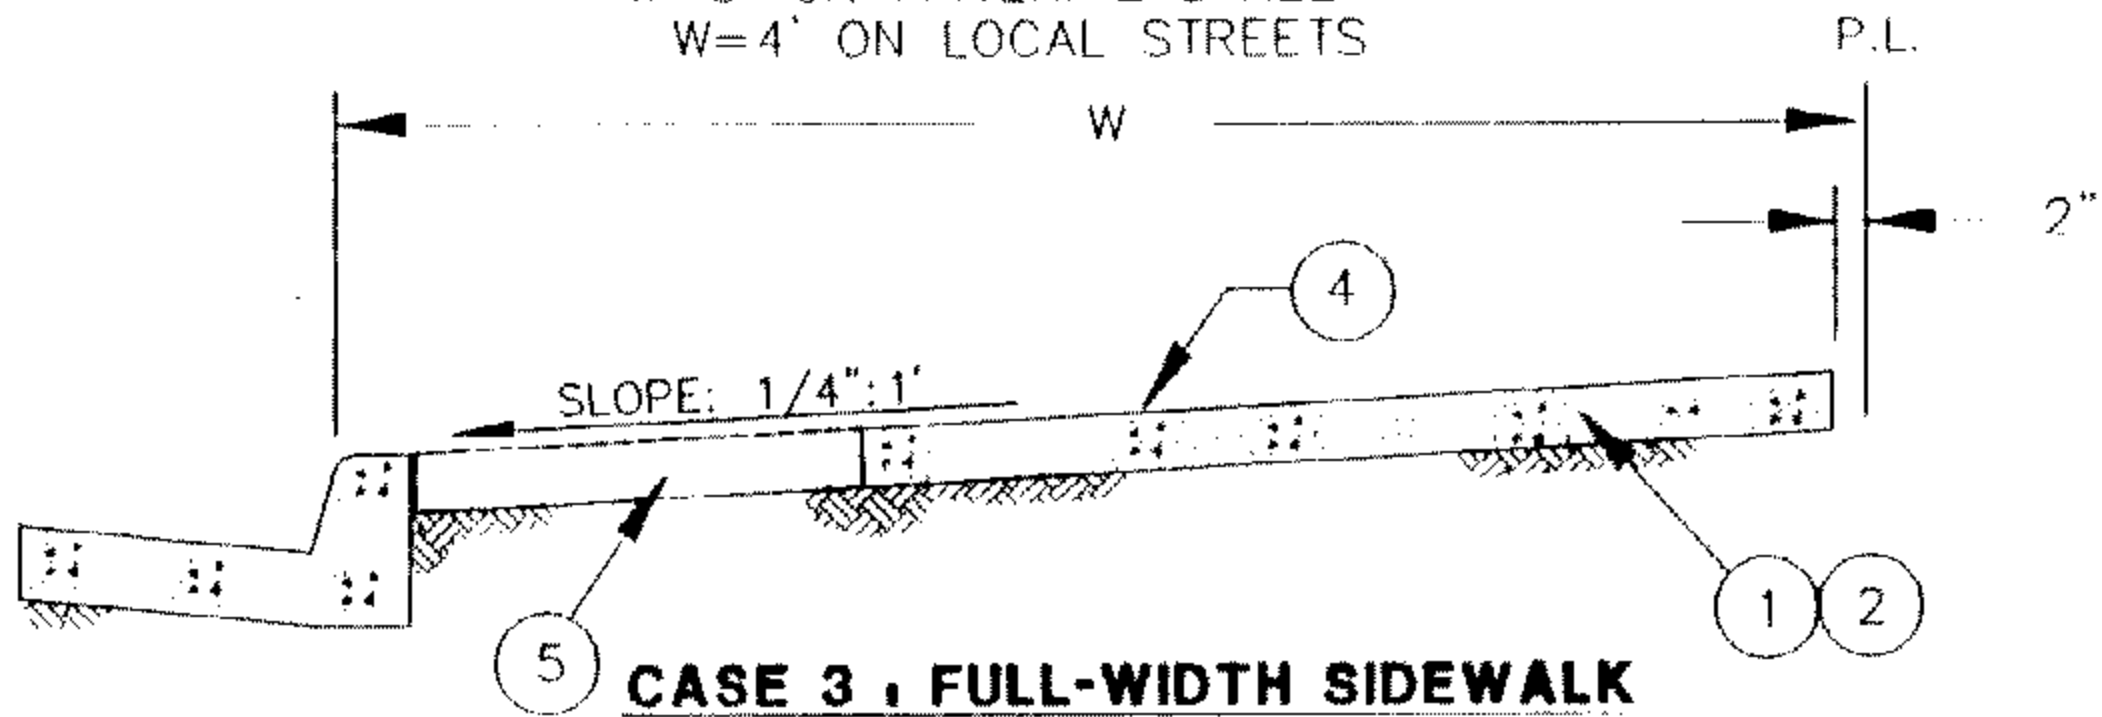

CASE 3, FULL-WIDTH SIDEWALK

W=FULL WIDTH SIDEWALK IN COMMERCIAL ZONES & WHERE PARKWAY IS LESS THAN 10'

- ① CONCRETE SHALL BE CLASS 520-C-2500, CONFORMING TO SUBSECTION 201-1 OF THE STANDARD SPECIFICATIONS.
- ② SIDEWALK THICKNESS = 4"
AT DRIVEWAYS : (a) COMMERCIAL AREA : THICKNESS=8".
(b) RESIDENTIAL AREA : THICKNESS=6".
- ③ PROVIDE 1/4" THICK EXPANSION JOINTS PER SECTION 303-5.4.2 OF THE STANDARD SPECIFICATIONS AT THE BC AND EC OF ALL WALK RETURNS, AROUND ALL UTILITY POLES. EXPANSION JOINT MATERIAL SHALL CONFORM TO SUBSECTION 201-3.2 OF THE STANDARD SPECIFICATIONS "PREMOLDED JOINT FILLER".
- ④ TRANSVERSE WEAKENED PLANE JOINTS SHALL BE PROVIDED PER SECTION 303-5.4.3 OF THE STANDARD SPECIFICATIONS.
- ⑤ CONSTRUCT 3'X3' TREE WELLS AT BACK OF CURB PER STD. PLAN NO. 1124 AND AS SHOWN ON PLANS.

REPLACES STD. PLAN NUMBER 104

APPROVED:

DATE: 12-22-88

[Signature]
CITY ENGINEER

• CITY OF SANTA ANA •

PUBLIC WORKS AGENCY



DATE	REVISION
5-17-95 SA	REVISE NOTE #3.
7-11-95 SA	DELETE NOTE #3 FROM DWG.
8-11-95 SA	CORRECTION IN DIMENSIONS

SIDEWALK DETAILS

STD. PLAN NUMBER
1104